

Trine Model 4450 Roll-Fed Labeling System



- Efficient glue wheel transfer to minimize glue consumption
- PLC controlled for reliability and ease of operation
- Smaller footprint utilizes less floor space
- Container infeed screw-feed standard













Trine Model 4450 Roll-Fed Labeling System

The 4450 roll fed wraparound system has been designed with an extended conveyor and feed screw change parts standard for smooth high-speed container handling. Equipped with quick change parts, a product changeover can take one person less than 15 minutes with just a single tool. The 4450 is designed with the latest in glue application technology and label registration control. With advanced technology , quicker changeovers, and affordable change parts, the 4450 provides a roll fed labeling system ideal for any demanding environment.

Applications

With applications in beverage, food, pharmaceutical, cosmetic, dairy, aerosol and nutritional product industries, Trine roll fed labeling systems have proven their versatility. Trine roll fed labelers provide ongoing savings by replacing higher-cost cut labels. Additionally, Trine systems can even be used to label contour containers with Trine's patented Roll 'n' Shrink technology. With over 1000 systems currently labeling brands such as Coke and Pepsi, you too can rely on Trine labelers.

Options

- Discharge stabilizer assembly
- Clear label sensor and low label detection
- Air conditioned electrical enclosure
- Servo-driven label registration system
- Alternative voltages, conveyor heights, and colors
- Custom product handling

Machine Specifications

Standard Label Dimensions:

Repeat Length: 6.5" to 16.5"

(1.53.4 mm to 419.1 mm)

Web Width: 1" to 8.25"

(25.4 mm to 209.6 mm)

Diameter: 1.75" to 5"

(44.5 mm to 127 mm)

Electrical Requirements:


240 volts AC, 3 phase, 50-60 hertz


Air Requirements:

80 psi (5.52 bar), 12-15 cfm (340-425 L/min)

Weight:

Approximately 3,700 lbs. (1678 kg)



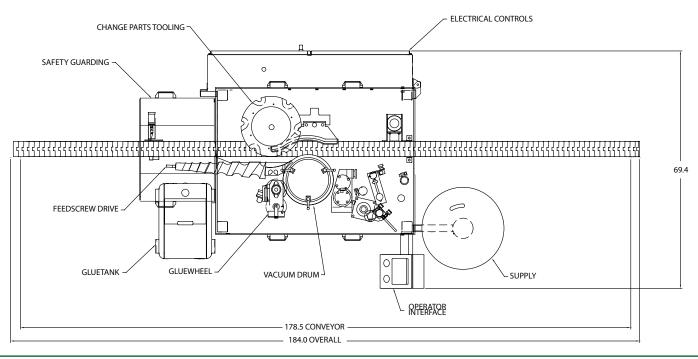

Accraply, Inc.